





GUIDE FOR BESPOKE MULTIPLE UNIT INSTALLATIONS

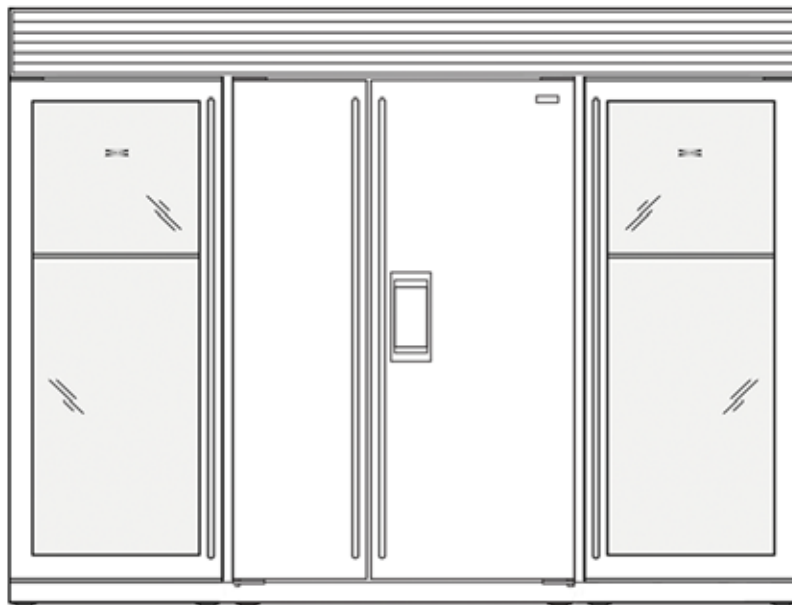


PROUD INSTALLATION OF CLASSIC STAINLESS STEEL ' /S ' UNITS

Using 36mm filler strip 9009251 or 9009252 inbetween units.


OVERALL DIMENSIONS - FRONT VIEW

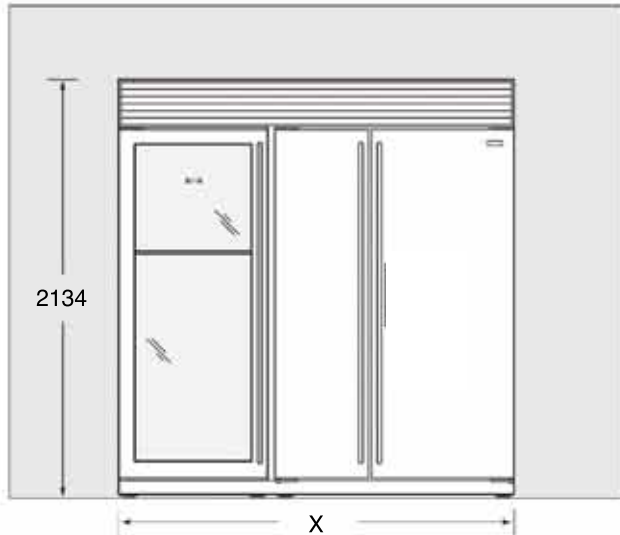

NICHE DIMENSIONS - FRONT VIEW

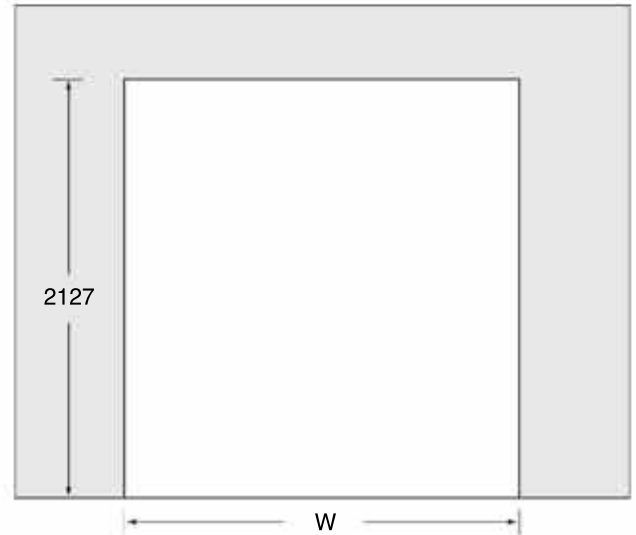

NICHE DIMENSIONS - TOP VIEW

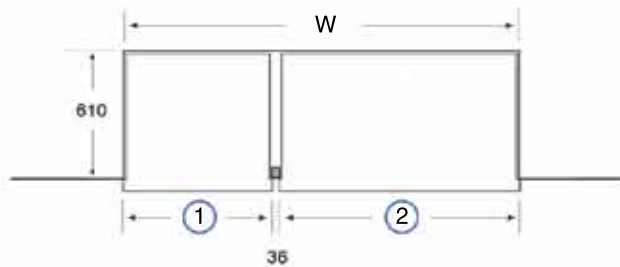

WIDTHS REFERENCE TABLE:

UNIT	WIDTH
ICBBI-30U	762 mm
ICBWS-30	762 mm
ICBBI-36	914 mm
ICBBI-42S(D)	1067 mm
ICBBI-48S(D)	1219 mm

WIDTHS CALCULATION:

2 UNITS:

- Overall (X) Add the widths of both units, plus 36 mm.
- Niche (W) Overall width minus 12 mm.
- Ventilation Grille Add the widths of both units, plus 36 mm.
- Plinth Ventilation Grille width minus 20 mm.

3 UNITS:

- Overall (X) Add all 3 units widths, plus 36 mm for each filler or 6 mm for each dual install kit
- Niche (W) Overall width minus 12 mm
- Ventilation Grille Add all 3 units widths, plus 36 mm for each filler or 6 mm for each dual install kit
- Plinth Ventilation Grille width minus 20 mm

4 UNITS:


- Overall (X) Add all 4 units widths, plus 36 mm for each filler or 6 mm for each dual install kit
- Niche (W) Overall width minus 12 mm
- Ventilation Grille Add all 4 units widths, plus 36 mm for each filler or 6 mm for each dual install kit
- Plinth Ventilation Grille width minus 20 mm

FLUSH INSTALLATION OF CLASSIC STAINLESS STEEL ' /S ' UNITS


Using 36mm filler strip 9009251 or 9009252 inbetween units.

NOTE: The Sub-Zero Design Guide Flush Installation Instructions for Overlay ' /O ' models do not apply.



OVERALL DIMENSIONS - FRONT VIEW

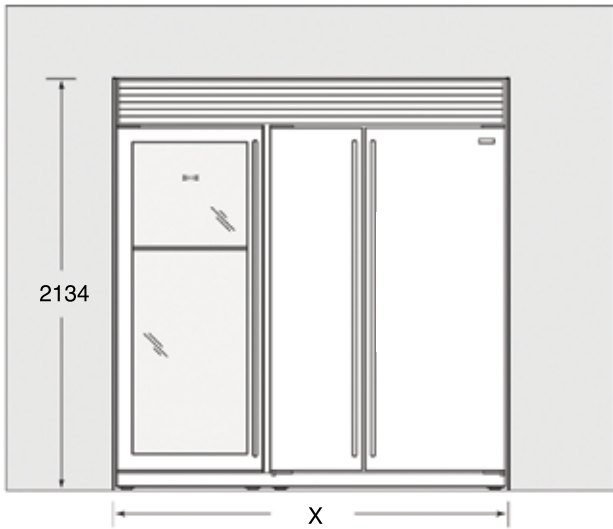

NICHE DIMENSIONS - FRONT VIEW

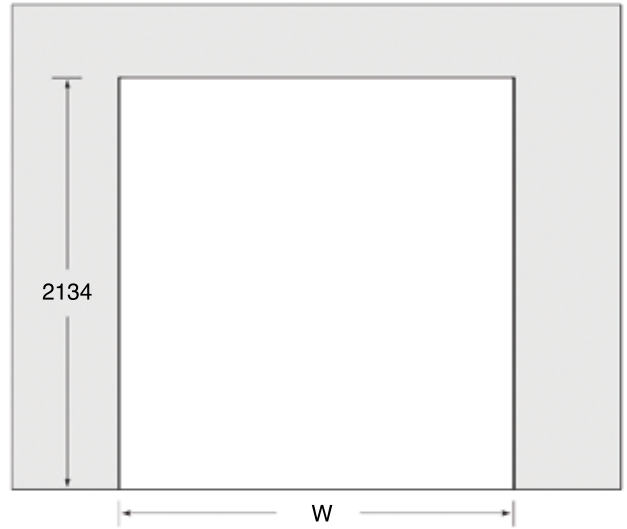

NICHE DIMENSIONS - TOP VIEW

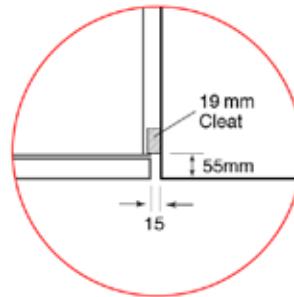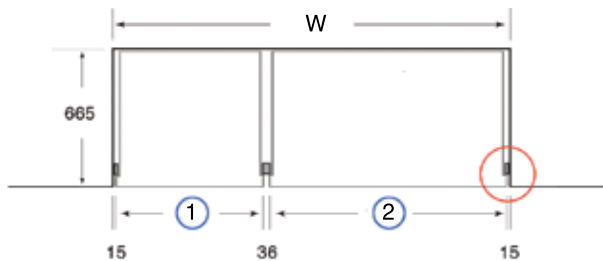

NOTE: The cleat is necessary to restrict the view down the side of the unit and needs to be supplied by the kitchen manufacturer.

WIDTHS CALCULATION:

2 UNITS:

- Overall (X) Add the widths of both units, plus 66 mm.
- Niche (W) Same as overall width.
- Ventilation Grille Add the widths of both units, plus 36 mm.
- Plinth Ventilation Grille width minus 20 mm.

3 UNITS:


- Overall (X) Add all 3 units widths, plus 30 mm, plus 36 mm for each filler or 6 mm for each dual install kit.
- Niche (W) Same as overall width.
- Ventilation Grille Add all 3 units widths, plus 36 mm for each filler or 6mm for each dual install kit.
- Plinth Ventilation Grille width minus 20 mm.

4 UNITS:


- Overall (X) Add all 4 units widths, plus 30 mm, plus 36 mm for each filler or 6mm for each dual install kit.
- Niche (W) Same as overall width.
- Ventilation Grille Add all 4 units widths, plus 36 mm for each filler or 6 mm for each dual install kit.
- Plinth Ventilation Grille width minus 20 mm.

EXAMPLE 1: PROUD INSTALLATION OF 2 CLASSIC STAINLESS STEEL ' /S ' UNITS
 MODELS: ICBWS-30/S and ICBB148SD/S or ICBB148S/S


OVERALL DIMENSIONS - FRONT VIEW

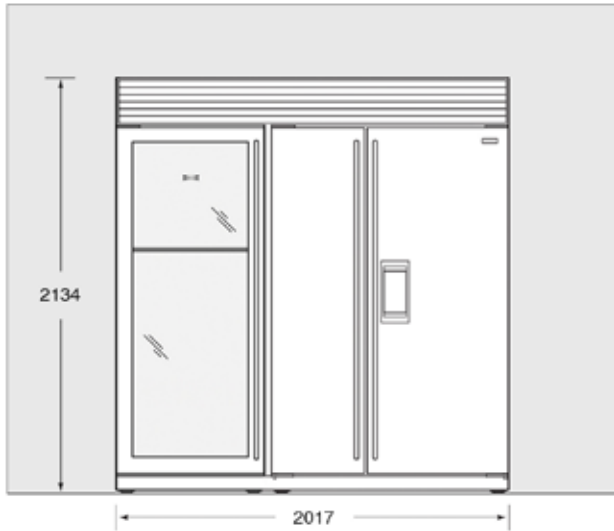

NICHE DIMENSIONS - FRONT VIEW

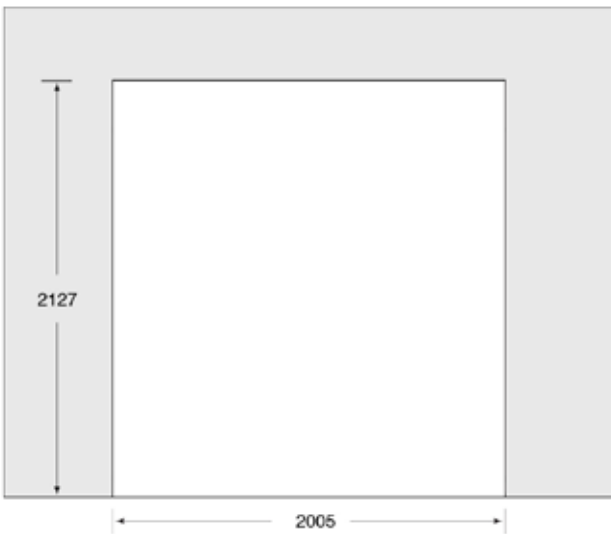

NICHE DIMENSIONS - TOP VIEW

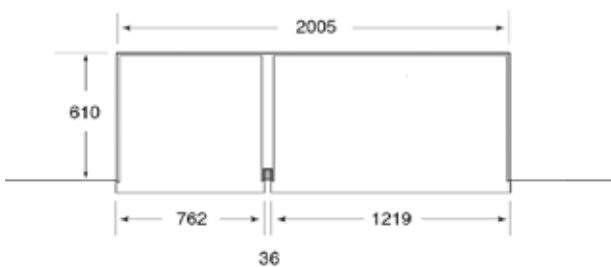


WIDTHS CALCULATION:


Overall: $762 + 36 + 1219 = 2017$ mm
 Niche: $2017 - 12 = 2005$ mm
 Ventilation Grille: $762 + 36 + 1219 = 2017$ mm
 S/S Plinth: $2017 - 20 = 1997$ mm

EXAMPLE 2: FLUSH INSTALLATION OF 2 CLASSIC STAINLESS STEEL ' /S ' UNITS
 MODELS: ICBWS-30/S and ICBBI48SD/S or ICBBI48S/S



OVERALL DIMENSIONS - FRONT VIEW

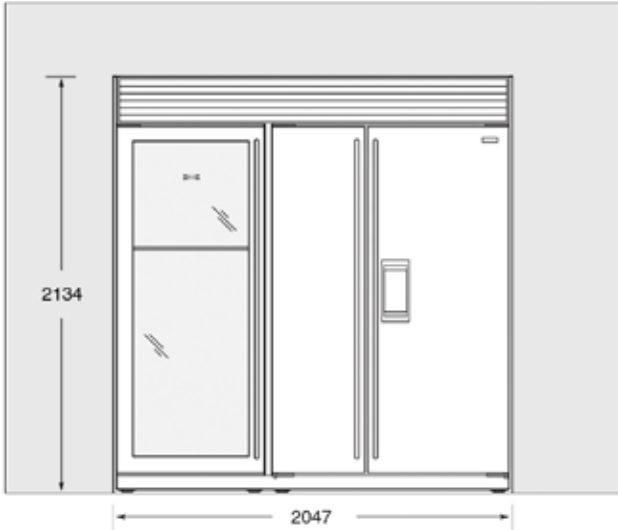

NICHE DIMENSIONS - FRONT VIEW

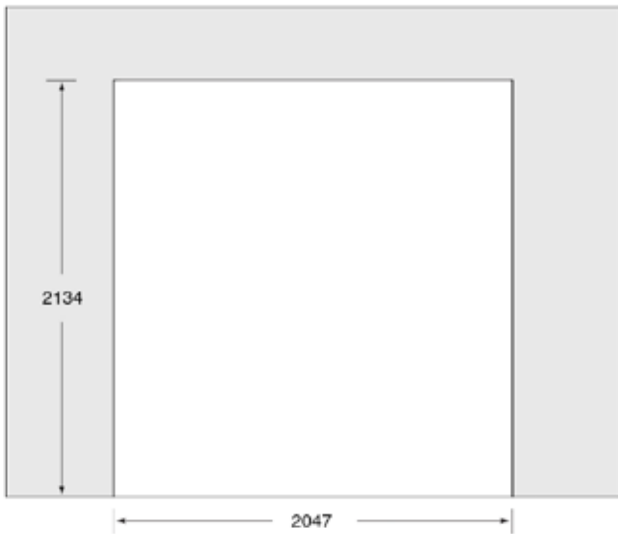

NICHE DIMENSIONS - TOP VIEW

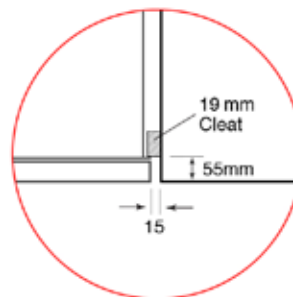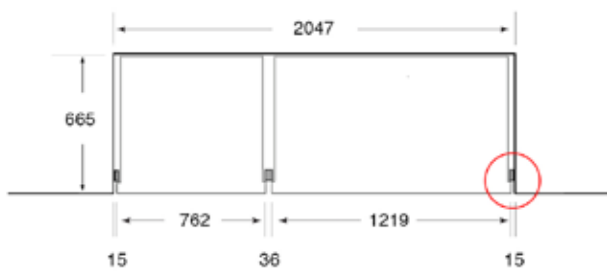


WIDTHS CALCULATION:


Overall:	$15 + 762 + 36 + 1219 + 15 = 2047 \text{ mm}$
Niche:	2047 mm
Ventilation Grille:	$762 + 36 + 1219 = 2017 \text{ mm}$
S/S Plinth:	$2017 - 20 = 1997 \text{ mm}$

EXAMPLE 3: PROUD INSTALLATION OF 3 CLASSIC STAINLESS STEEL ' /S ' UNITS
 MODELS: 2x ICBWS-30/S and ICBB148SD/S or ICBB148S/S


OVERALL DIMENSIONS - FRONT VIEW

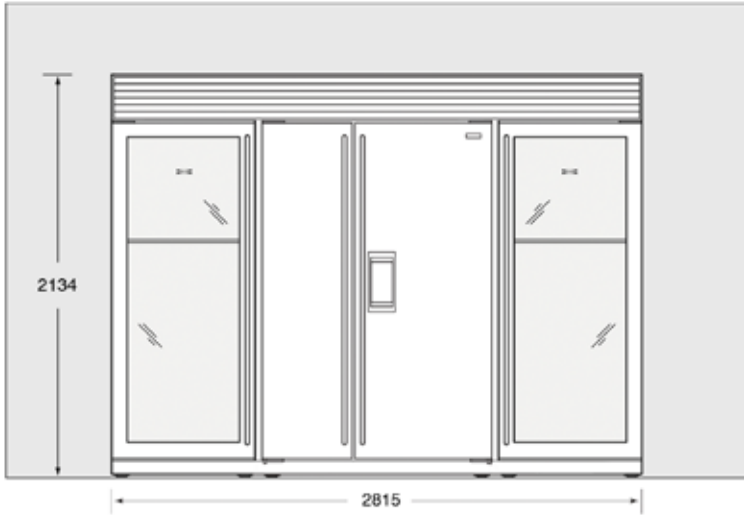

NICHE DIMENSIONS - FRONT VIEW

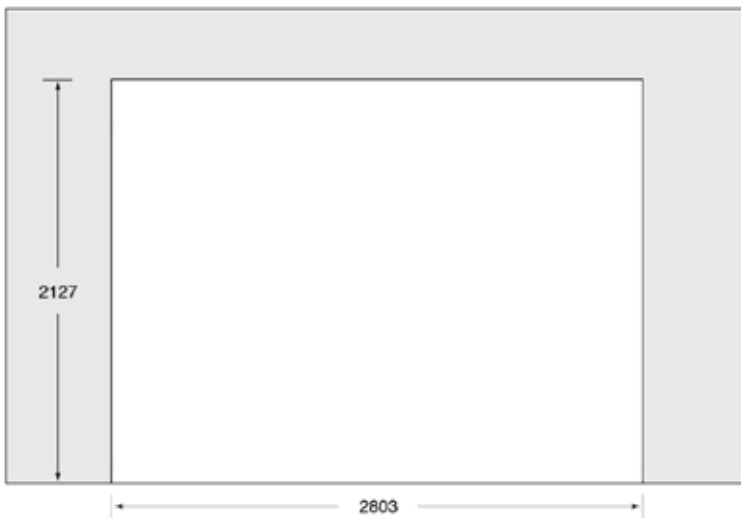

NICHE DIMENSIONS - TOP VIEW

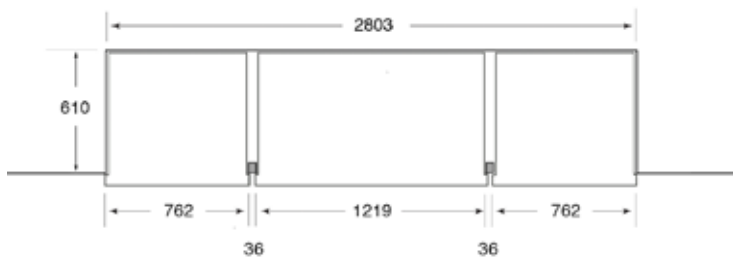

WIDTHS CALCULATION:


Overall: $762 + 36 + 1219 + 36 + 762 = 2815$ mm
 Niche: $2815 - 12 = 2803$ mm
 Ventilation Grille: $914 + 36 + 762 + 36 + 914 = 2815$ mm
 S/S Plinth: $2815 - 20 = 2795$ mm

EXAMPLE 4: PROUD INSTALLATION OF 3 CLASSIC STAINLESS STEEL ' /S ' UNITS
 MODELS: ICBWS-30/S and 2x ICBBI36R/S, ICBBI36F/S or ICBBI36U/S


OVERALL DIMENSIONS - FRONT VIEW



NICHE DIMENSIONS - FRONT VIEW

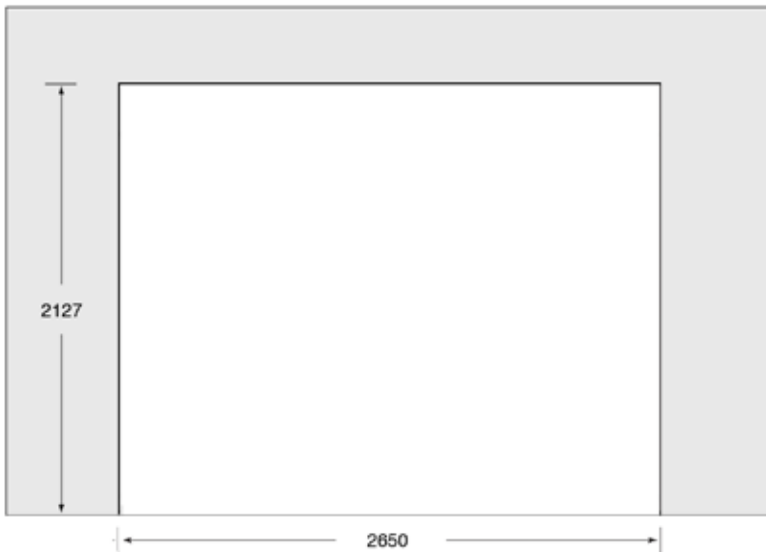

NICHE DIMENSIONS - TOP VIEW

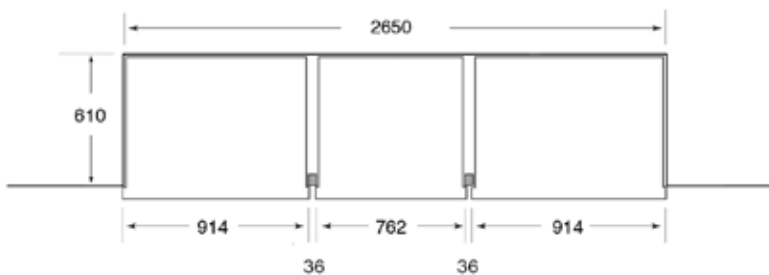


WIDTHS CALCULATION:

Overall: $914 + 36 + 762 + 36 + 914 = 2662$ mm
 Niche: $2662 - 12 = 2650$ mm
 Ventilation Grille: $914 + 36 + 762 + 36 + 914 = 2662$ mm
 S/S Plinth: $2662 - 20 = 2642$ mm

EXAMPLE 5: FLUSH INSTALLATION OF 4 CLASSIC STAINLESS STEEL ' /S ' UNITS
 MODELS: 2x ICBWS-30/S and 2x ICBBI-36R/S, ICBBI-36F/S or ICBBI-36U/S



OVERALL DIMENSIONS - FRONT VIEW

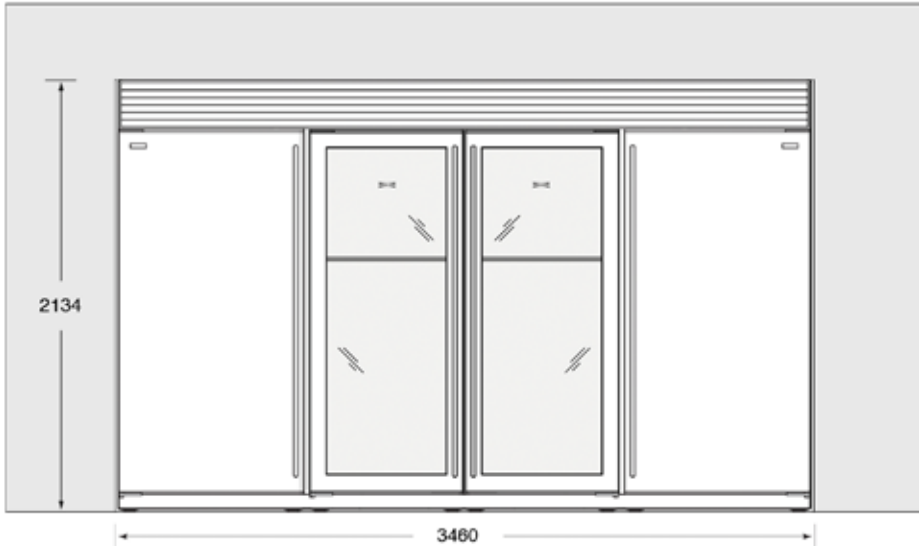

NICHE DIMENSIONS - FRONT VIEW



NICHE DIMENSIONS - TOP VIEW

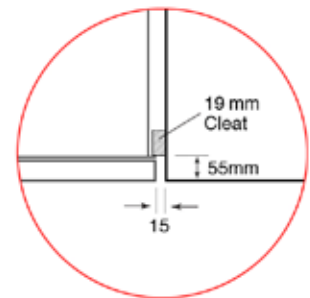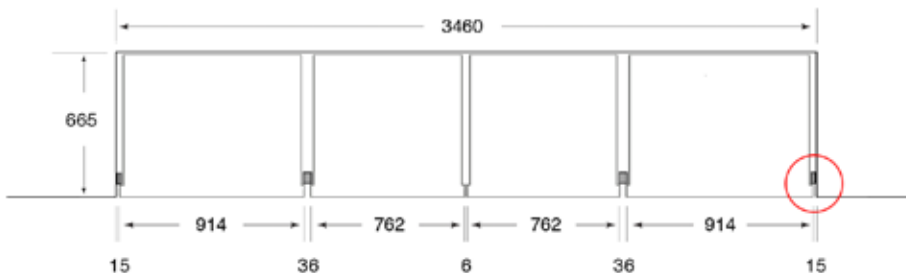

WIDTHS CALCULATION:

Overall: $15 + 914 + 36 + 762 + 6 + 762 + 36 + 914 + 15 = 3460$ mm
 Niche: 3460 mm
 Ventilation Grille: $914 + 36 + 762 + 6 + 762 + 36 + 914 = 3430$ mm
 S/S Plinth: $3430 - 20 = 3410$ mm