


FEATURES

- Stainless steel control panel.
- Can be installed in a standard or flush inset application.
- Crafted of heavy-duty stainless steel.
- Dual convection oven with two fans for even heat distribution.
- Ten cooking modes—bake, roast, broil, convection, convection bake, convection roast, convection broil and proof—bake stone and dehydration modes require accessory.
- Cobalt blue porcelain oven interior.
- Large viewing, double-pane window and dual halogen interior lights.
- Three adjustable oven racks; one full-extension easy glide, one full-extension door glide and one standard.
- Hidden bake element and recessed broil element.
- Temperature probe and broiler pan.
- Self-clean, delayed start, timed cook and Sabbath features.
- Balanced door hinge system for smooth opening and closing.

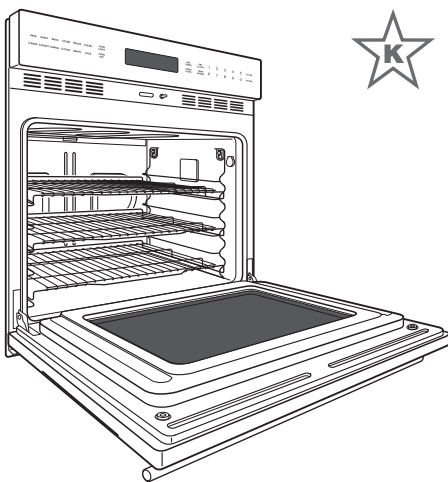

MODEL OPTIONS

Transitional	SO30TE/S/TH
--------------	-------------


ACCESSORIES

- Bake stone kit—includes stone, rack and peel.
- Dehydration kit—includes racks and door stop.
- Set of three standard oven racks.
- Full-extension easy glide rack.
- 30" premiere baking pan.
- Temperature probe and broiler pan.

Accessories available through an authorized Wolf dealer. For local dealer information, visit the find a showroom section of our website, wolfappliance.com.

SPECIFICATIONS	
PRODUCT	
Dimensions	29 ⁷ / ₈ "W x 27 ⁷ / ₈ "H x 23 ³ / ₄ "D
Weight	273 lb
OVEN INTERIOR	
Capacity	4.5 cu ft
Interior	25"W x 16 ¹ / ₂ "H x 19"D
ELECTRICAL	
Supply	240/208 VAC, 60 Hz
Service	30 amp circuit
Conduit	4 ft


DIMENSIONS

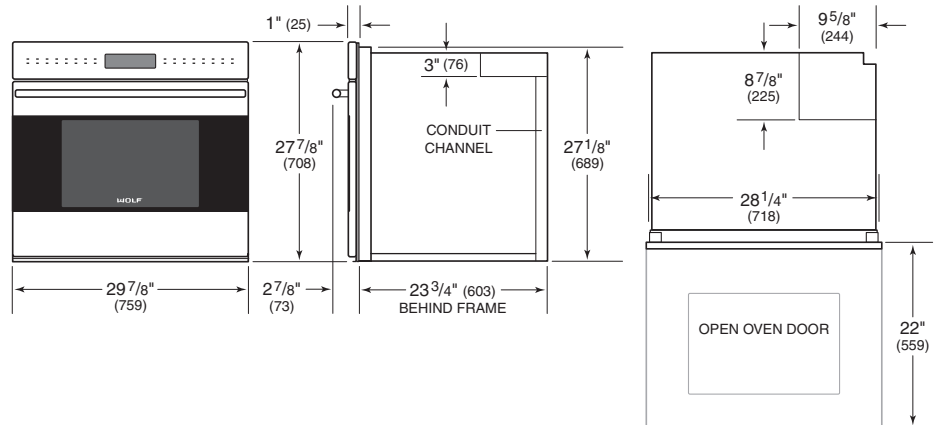

Specifications are subject to change without notice. Visit wolfappliance.com/specs for the most up-to-date information.


Dimensions may vary $\pm 1/8$ " (3). Dimensions in parentheses are millimeters unless otherwise specified.

STANDARD INSTALLATION

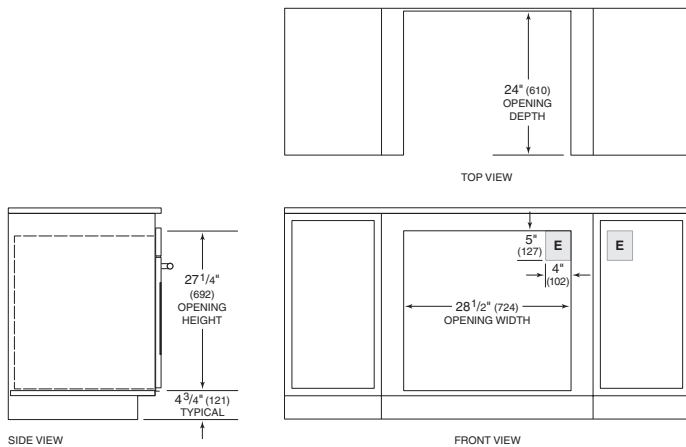

NOTE: Location of electrical supply within opening may require additional cabinet depth. Dashed line represents profile of unit.

FLUSH INSET INSTALLATION

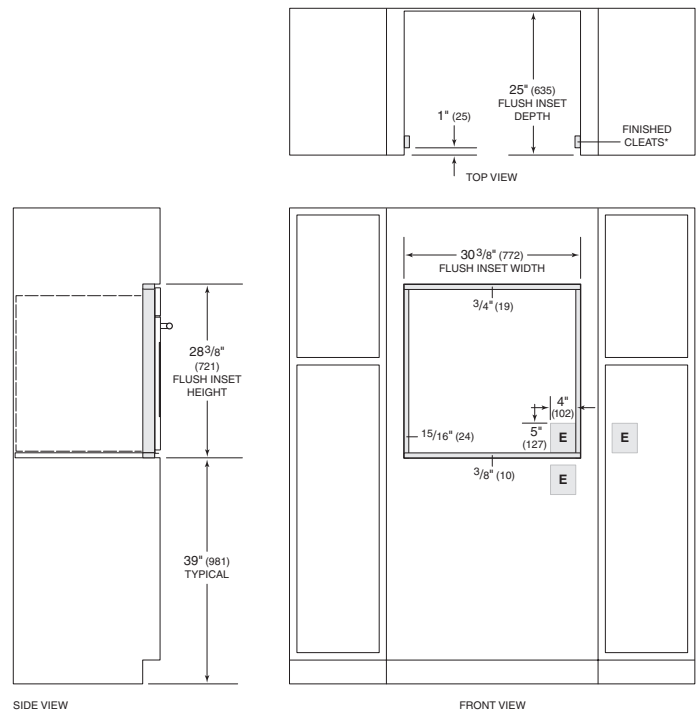

*Will be visible and should be finished to match cabinetry.

NOTE: Location of electrical supply within opening may require additional cabinet depth. Dashed line represents profile of unit.