



SRT DESIGN GUIDE

ICB REVISED 4/2018

TABLE OF CONTENTS

3	RANGETOPS
---	-----------



Features and specifications are subject to change at any time without notice.


Throughout this guide, dimensions may vary by ± 3 mm.

Sealed Burner Rangetops

Wolf sealed burner rangetops incorporate all the gas cooking features of a Wolf dual fuel range. Customize your rangetop with your preferred combination of burners (from four to six), infrared griddle or charbroiler, or the remarkable French top. Compared with conventional electric elements, the infrared elements of the charbroiler and griddle are a revelation. They preheat almost instantly, distribute heat more evenly and deliver fast temperature recovery after food is placed on the surface. All sealed burner rangetop models are constructed of stainless steel and can be ordered in natural or LP gas.


CONFIGURATIONS

76 cm RANGETOP




ICBSRT304

91 cm RANGETOP




ICBSRT364C




ICBSRT364G


122 cm RANGETOP




ICBSRT486C



ICBSRT486G



ICBSRT484CG




ICBSRT484F


SEALED BURNER RANGETOPS

Sealed Burner Rangetops


76 cm RANGETOP

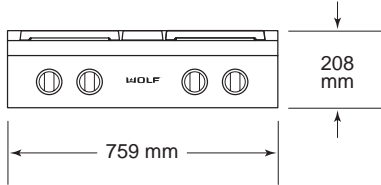

91 cm RANGETOP

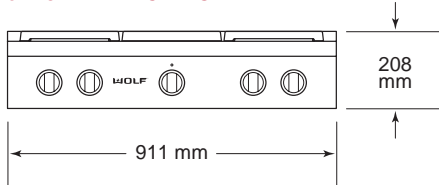

122 cm RANGETOP

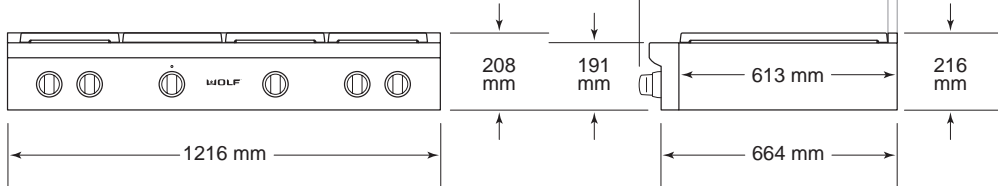

SIDE VIEW – ALL RANGETOPS

BURNER RATING – Mj/h

SURFACE BURNER	NG
Large	16
Small	9
FEATURE	NG
Charbroiler	15
Griddle	15
French Top	15

Planning Information

The platform to support the sealed burner rangetop must include a cut-out for electrical and gas supply connections. Refer to the chart below for minimum base support.

When installing against a combustible surface, a minimum 254 mm riser is required for 91 cm and 122 cm sealed burner rangetops with a charbroiler or griddle. Follow all minimum clearances to combustible surfaces shown in the illustration on the following page.

A Wolf pro ventilation hood is recommended with the sealed burner rangetop.

A downdraft can be used with model ICBSRT304. An accessory trim kit is necessary for this installation. Contact an authorized Wolf dealer for details.

INSTALLATION REQUIREMENTS

PLATFORM	
Thickness	19 mm
BASE SUPPORT	
	MIN
76 cm Rangetop	91 kg
91 cm Rangetop	113 kg
122 cm Rangetop	136 kg

ELECTRICAL

Installation must comply with all applicable electrical codes and be properly grounded (earthed).

Locate the electrical supply within the shaded area shown in the illustration on the following page. A separate circuit, servicing only this appliance is required.

ELECTRICAL REQUIREMENTS

Electrical Supply	grounded, 220-240 VAC; 50/60 Hz
Service	0.2 A
Receptacle	3-prong grounding-type
Power Cord	2 m

GAS SUPPLY

Installation must conform with all applicable gas codes.

A gas supply line of 19 mm rigid pipe is advisable to be provided to the rangetop. If local codes permit, a certified, .9 m long, 13 mm or 19 mm ID flexible appliance connector is recommended to connect the units ISO 7/1-14 female inlet to the gas supply line.


Wolf natural gas rangetops will function up to 3124 m in altitude without adjustment and LP gas ranges will function up to 2621 m. If the installation exceeds these elevations, contact an authorized Wolf dealer for a high altitude conversion kit.

GAS REQUIREMENTS

NATURAL GAS	
Supply Pressure	1 Kpa
LP GAS	
Supply Pressure	2.75 Kpa

Sealed Burner Rangetop

INSTALLATION

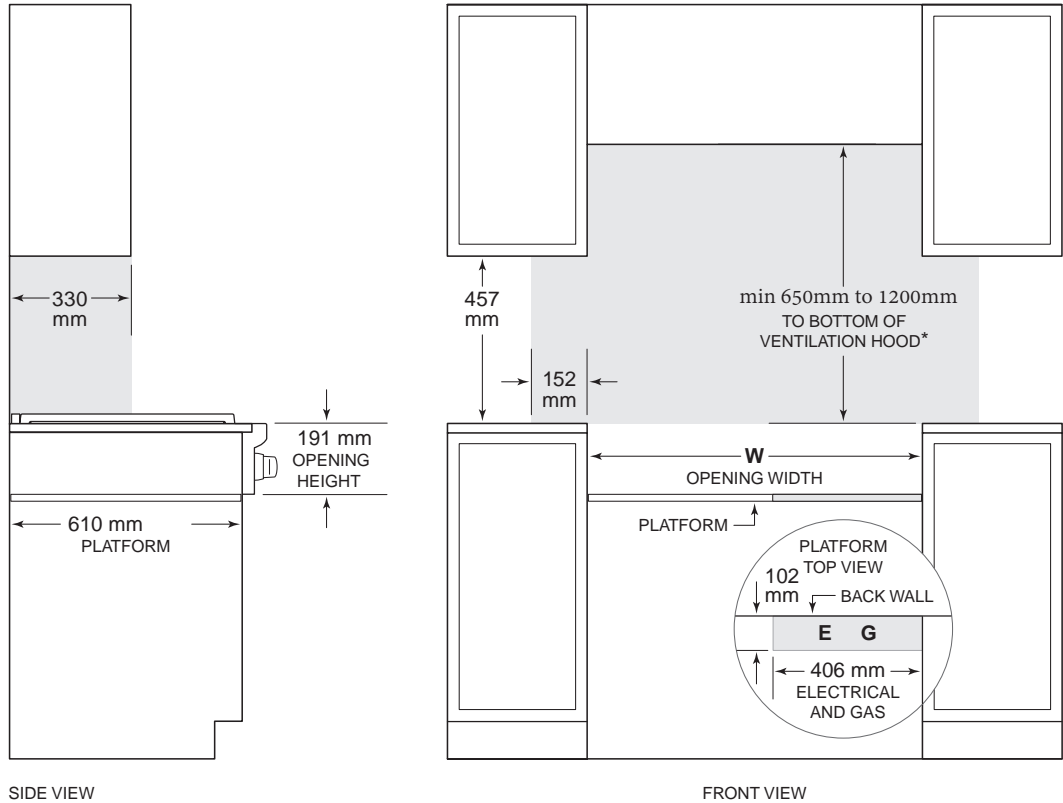

SIDE VIEW

FRONT VIEW

*The rangehood fitted above the cooktop must be installed according to the installation instructions for the rangehoods.

A minimum clearance of 650mm from the top of the burner port to a grease filter/range hood/combustible surface and 750mm to an Exhaust fan. For models with Char Grill burner a minimum clearance of 1200mm to a grease filter/range hood/combustible surface from the top of the burner ports of the Char Grill burner

Electrical and gas supply located through bottom of platform.

For island installation, 305 mm minimum clearance back of range to combustible rear wall above countertop.

OPENING WIDTH	W
76 cm Model	762 mm
91 cm Model	914 mm
122 cm Model	1219 mm

Wolf Appliance International Limited Warranty

FOR RESIDENTIAL USE

FULL TWO YEAR WARRANTY*

For two years from the date of original installation, this Wolf Appliance product warranty covers all parts and labor to repair or replace, under normal residential use, any part of the product that proves to be defective in materials or workmanship. All service provided by Wolf Appliance under the above warranty must be performed by Wolf factory certified service, unless otherwise specified by Wolf Appliance, Inc. Service will be provided during normal business hours.

LIMITED THIRD THROUGH FIFTH YEAR WARRANTY

For five years from the date of original installation, Wolf Appliance will repair or replace the following parts that prove to be defective in materials or workmanship: gas burners (excluding appearance), electric heating elements, blower motors (ventilation hoods), electronic control boards, magnetron tubes and induction generators. The part(s) will be repaired or replaced, free of charge, with the owner paying for all other costs including labor. All service provided by Wolf Appliance under the above warranty must be performed by Wolf factory certified service, unless otherwise specified by Wolf Appliance, Inc. Service will be provided during normal business hours.

For more information regarding your Wolf product warranty, contact your authorized Wolf dealer. Warranties must comply to all country, state, city, local and or ordinance.

*Stainless steel (doors, panels, handles, product frames and interior surfaces) are covered by a limited 60-day parts and labor warranty for cosmetic defects.





subzero-wolf.com.au