




GUIDE FOR BESPOKE MULTIPLE UNIT INSTALLATIONS



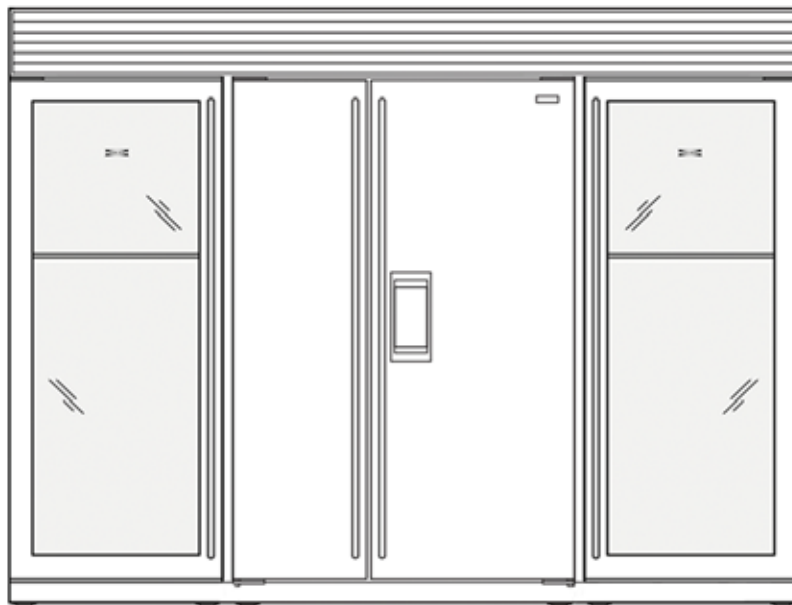


BESPOKE MULTIPLE UNIT INSTALLATIONS


PROUD INSTALLATION OF CLASSIC STAINLESS STEEL ' /S ' UNITS

Using 36mm filler strip 9009251 or 9009252 inbetween units.


OVERALL DIMENSIONS - FRONT VIEW

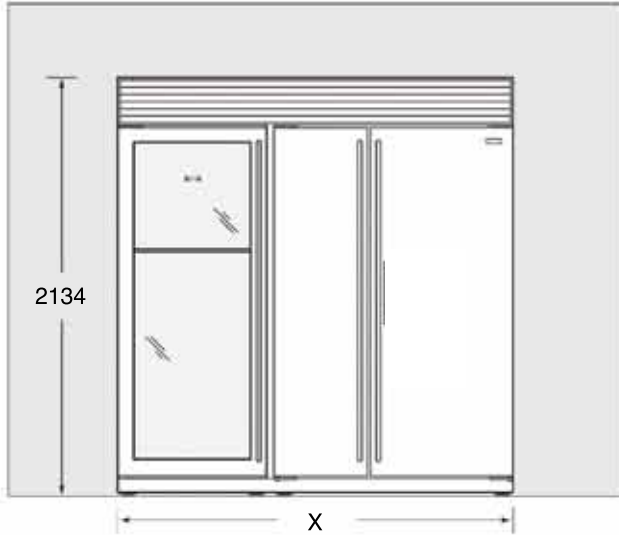

NICHE DIMENSIONS - FRONT VIEW

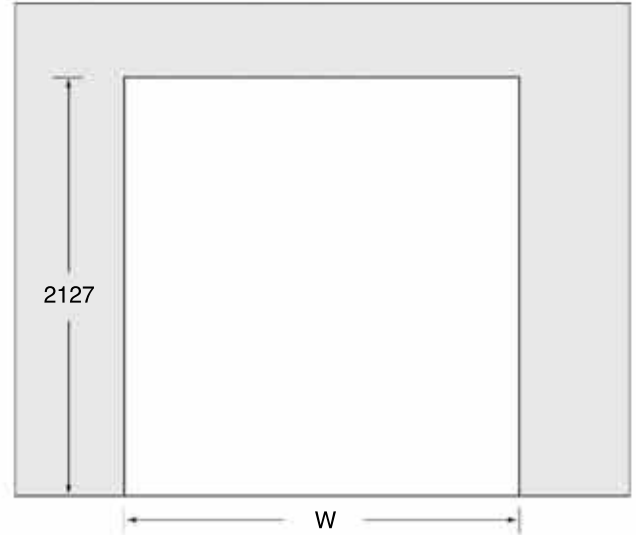

NICHE DIMENSIONS - TOP VIEW

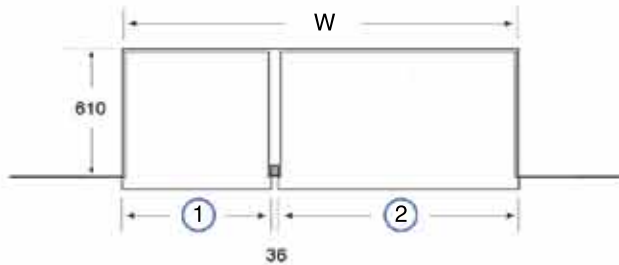

WIDTHS REFERENCE TABLE:

UNIT	WIDTH
ICBBI-30U	762 mm
ICBWS-30	762 mm
ICBBI-36	914 mm
ICBBI-42S(D)	1067 mm
ICBBI-48S(D)	1219 mm

WIDTHS CALCULATION:

2 UNITS:

Overall (X)	Add the widths of both units, plus 36 mm.
Niche (W)	Overall width minus 12 mm.
Ventilation Grille	Add the widths of both units, plus 36 mm.
Plinth	Ventilation Grille width minus 20 mm.

3 UNITS:

Overall (X)	Add all 3 units widths, plus 36 mm for each filler or 6 mm for each dual install kit
Niche (W)	Overall width minus 12 mm
Ventilation Grille	Add all 3 units widths, plus 36 mm for each filler or 6 mm for each dual install kit
Plinth	Ventilation Grille width minus 20 mm

4 UNITS:

Overall (X)	Add all 4 units widths, plus 36 mm for each filler or 6 mm for each dual install kit
Niche (W)	Overall width minus 12 mm
Ventilation Grille	Add all 4 units widths, plus 36 mm for each filler or 6 mm for each dual install kit
Plinth	Ventilation Grille width minus 20 mm




BESPOKE MULTIPLE UNIT INSTALLATIONS

FLUSH INSTALLATION OF CLASSIC STAINLESS STEEL ' /S ' UNITS


Using 36mm filler strip 9009251 or 9009252 inbetween units.

NOTE: The Sub-Zero Design Guide Flush Installation Instructions for Overlay ' /O ' models do not apply.



OVERALL DIMENSIONS - FRONT VIEW

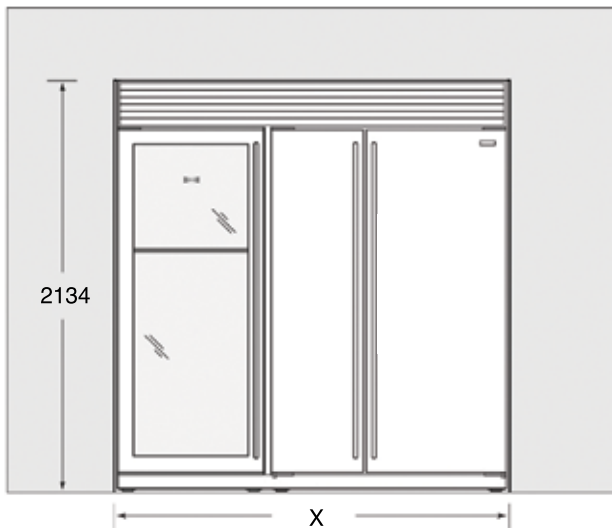

NICHE DIMENSIONS - FRONT VIEW

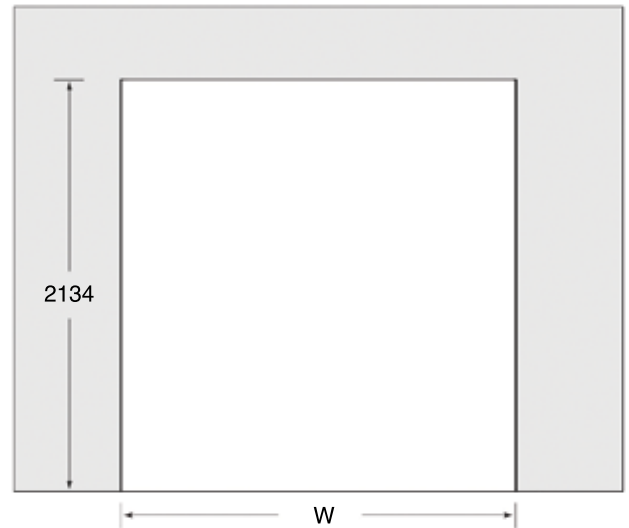

NICHE DIMENSIONS - TOP VIEW

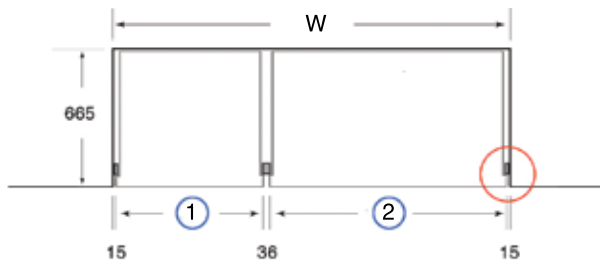

NOTE: The cleat is necessary to restrict the view down the side of the unit and needs to be supplied by the kitchen manufacturer.

WIDTHS CALCULATION:

2 UNITS:

Overall (X)	Add the widths of both units, plus 66 mm.
Niche (W)	Same as overall width.
Ventilation Grille	Add the widths of both units, plus 36 mm.
Plinth	Ventilation Grille width minus 20 mm.

3 UNITS:

Overall (X)	Add all 3 units widths, plus 30 mm, plus 36 mm for each filler or 6 mm for each dual install kit.
Niche (W)	Same as overall width.
Ventilation Grille	Add all 3 units widths, plus 36 mm for each filler or 6mm for each dual install kit.
Plinth	Ventilation Grille width minus 20 mm.

4 UNITS:


Overall (X)	Add all 4 units widths, plus 30 mm, plus 36 mm for each filler or 6mm for each dual install kit.
Niche (W)	Same as overall width.
Ventilation Grille	Add all 4 units widths, plus 36 mm for each filler or 6 mm for each dual install kit.
Plinth	Ventilation Grille width minus 20 mm.




BESPOKE MULTIPLE UNIT INSTALLATIONS

EXAMPLE 1: PROUD INSTALLATION OF 2 CLASSIC STAINLESS STEEL ' /S ' UNITS
MODELS: ICBWS-30/S and ICBB148SD/S or ICBB148S/S


OVERALL DIMENSIONS - FRONT VIEW

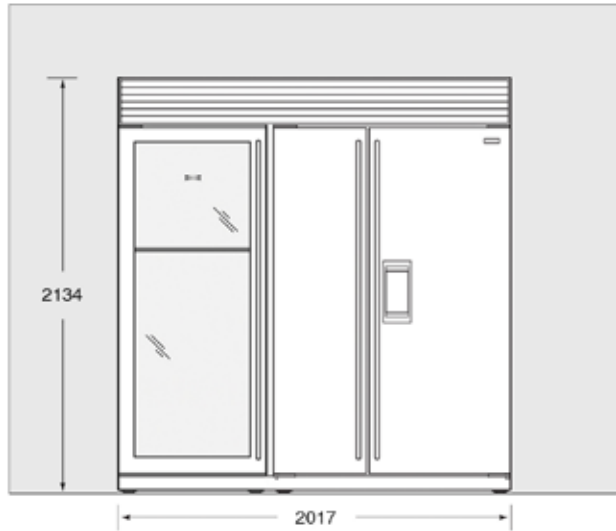

NICHE DIMENSIONS - FRONT VIEW

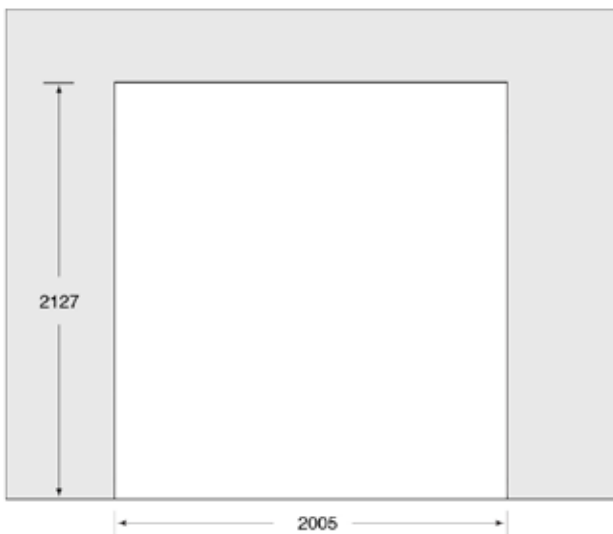

NICHE DIMENSIONS - TOP VIEW

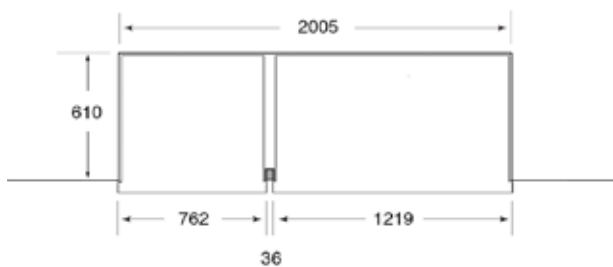

WIDTHS CALCULATION:


Overall: $762 + 36 + 1219 = 2017$ mm
Niche: $2017 - 12 = 2005$ mm
Ventilation Grille: $762 + 36 + 1219 = 2017$ mm
S/S Plinth: $2017 - 20 = 1997$ mm




BESPOKE MULTIPLE UNIT INSTALLATIONS

EXAMPLE 2: FLUSH INSTALLATION OF 2 CLASSIC STAINLESS STEEL ' /S ' UNITS
MODELS: ICBWS-30/S and ICBBI48SD/S or ICBBI48S/S



OVERALL DIMENSIONS - FRONT VIEW

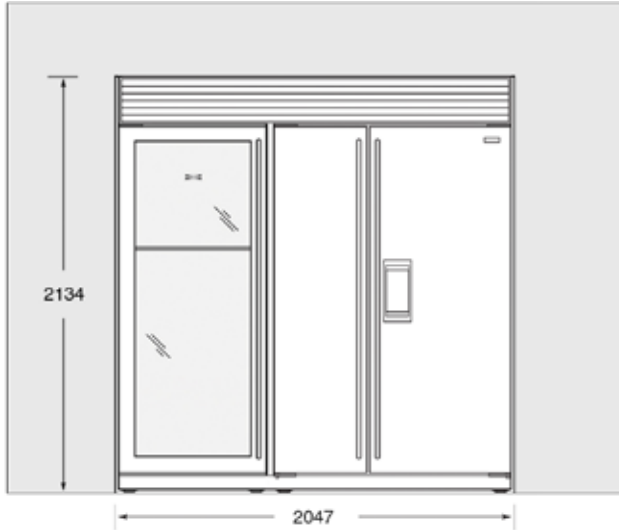

NICHE DIMENSIONS - FRONT VIEW

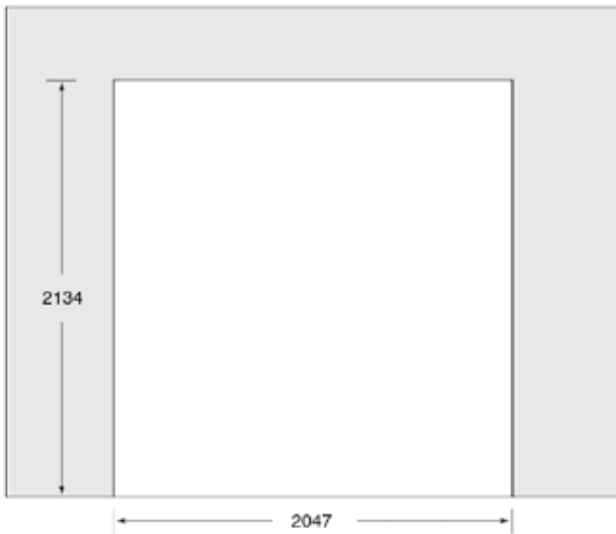

NICHE DIMENSIONS - TOP VIEW

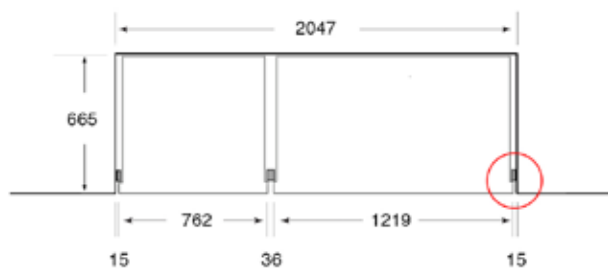

WIDTHS CALCULATION:


Overall: $15 + 762 + 36 + 1219 + 15 = 2047$ mm
Niche: 2047 mm
Ventilation Grille: $762 + 36 + 1219 = 2017$ mm
S/S Plinth: $2017 - 20 = 1997$ mm




BESPOKE MULTIPLE UNIT INSTALLATIONS

EXAMPLE 3: PROUD INSTALLATION OF 3 CLASSIC STAINLESS STEEL ' /S ' UNITS
MODELS: 2x ICBWS-30/S and ICBBI48SD/S or ICBBI48S/S


OVERALL DIMENSIONS - FRONT VIEW

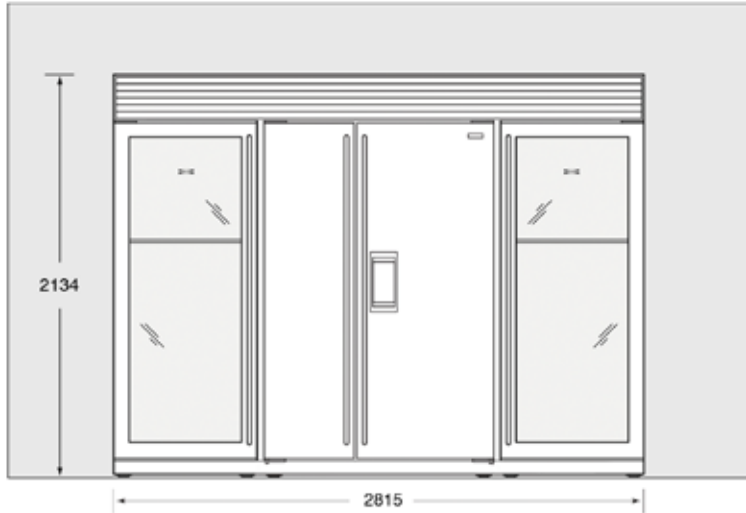

NICHE DIMENSIONS - FRONT VIEW

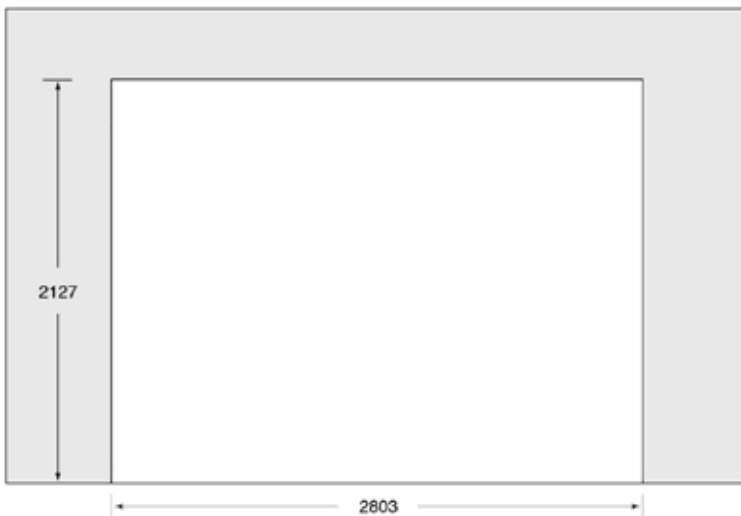

NICHE DIMENSIONS - TOP VIEW

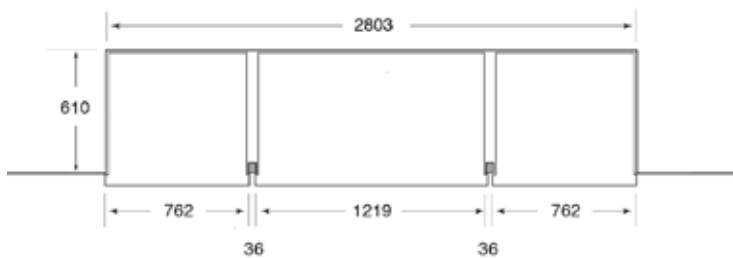

WIDTHS CALCULATION:

Overall: $762 + 36 + 1219 + 36 + 762 = 2815$ mm
Niche: $2815 - 12 = 2803$ mm
Ventilation Grille: $914 + 36 + 762 + 36 + 914 = 2815$ mm
S/S Plinth: $2815 - 20 = 2795$ mm




BESPOKE MULTIPLE UNIT INSTALLATIONS

EXAMPLE 4: PROUD INSTALLATION OF 3 CLASSIC STAINLESS STEEL ' /S ' UNITS
MODELS: ICBWS-30/S and 2x ICBBI36R/S, ICBBI36F/S or ICBBI36U/S


OVERALL DIMENSIONS - FRONT VIEW



NICHE DIMENSIONS - FRONT VIEW

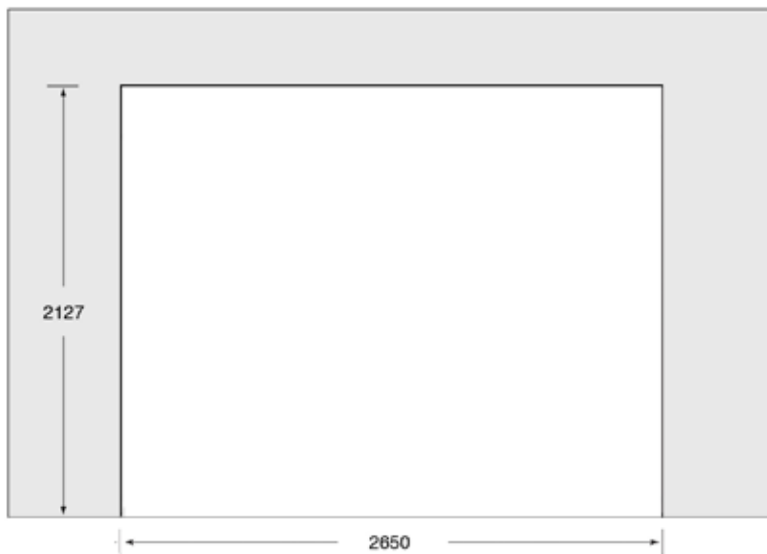

NICHE DIMENSIONS - TOP VIEW

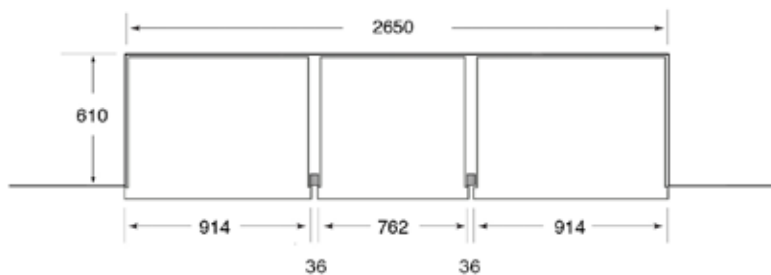

WIDTHS CALCULATION:


Overall: $914 + 36 + 762 + 36 + 914 = 2662$ mm
Niche: $2662 - 12 = 2650$ mm
Ventilation Grille: $914 + 36 + 762 + 36 + 914 = 2662$ mm
S/S Plinth: $2662 - 20 = 2642$ mm



BESPOKE MULTIPLE UNIT INSTALLATIONS

EXAMPLE 5: FLUSH INSTALLATION OF 4 CLASSIC STAINLESS STEEL ' /S ' UNITS
MODELS: 2x ICBWS-30/S and 2x ICBBI-36R/S, ICBBI-36F/S or ICBBI-36U/S



OVERALL DIMENSIONS - FRONT VIEW

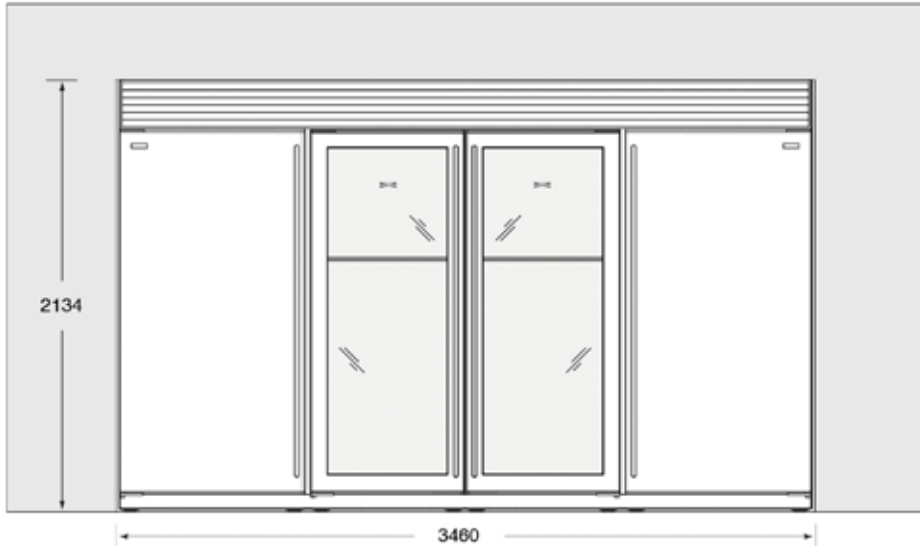

NICHE DIMENSIONS - FRONT VIEW



NICHE DIMENSIONS - TOP VIEW

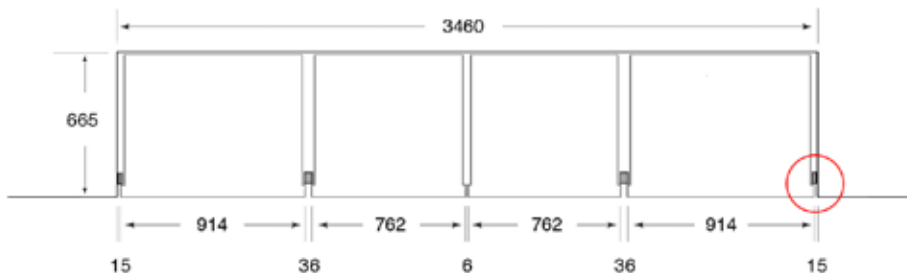

WIDTHS CALCULATION:

Overall: $15 + 914 + 36 + 762 + 6 + 762 + 36 + 914 + 15 = 3460$ mm
Niche: 3460 mm
Ventilation Grille: $914 + 36 + 762 + 6 + 762 + 36 + 914 = 3430$ mm
S/S Plinth: $3430 - 20 = 3410$ mm