


FEATURES

- Stainless steel control panel.
- Can be installed in a standard or flush inset application.
- Crafted of heavy-duty stainless steel.
- Dual convection upper oven with two fans for even heat distribution.
- Ten cooking modes in upper oven—bake, roast, broil, convection, convection bake, convection roast, convection broil and proof—bake stone and dehydration modes require accessory. Four modes in lower oven.
- Cobalt blue porcelain oven interiors.
- Large viewing, double-pane windows and dual halogen interior lights.
- Three adjustable oven racks; one full-extension easy glide, one full-extension door glide and one standard in each oven.
- Hidden bake elements and recessed broil elements.
- Temperature probe and broiler pan.
- Self-clean, delayed start, timed cook and Sabbath features.
- Balanced door hinge system for smooth opening and closing.

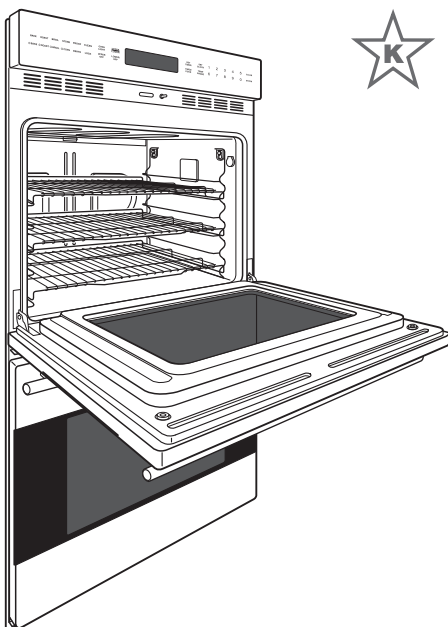

MODEL OPTIONS	
Transitional	DO30TE/S/TH

ACCESSORIES

- Bake stone kit—includes stone, rack and peel.
- Dehydration kit—includes racks and door stop.
- Set of three standard oven racks.
- Full-extension easy glide rack.
- 30" premiere baking pan.
- Temperature probe and broiler pan.

Accessories available through an authorized Wolf dealer. For local dealer information, visit the find a showroom section of our website, wolfappliance.com.

SPECIFICATIONS

PRODUCT

Dimensions 29⁷/₈"W x 50³/₈"H x 23³/₄"D
 Weight 466 lb

OVEN INTERIOR

Capacity (per oven) 4.5 cu ft
 Interior 25"W x 16¹/₂"H x 19"D


ELECTRICAL

Supply 240/208 VAC, 60 Hz
 Service 50 amp circuit
 Conduit 5 ft


Specifications are subject to change without notice. Visit wolfappliance.com/specs for the most up-to-date information.

Dimensions may vary ±1/8" (3). Dimensions in parentheses are millimeters unless otherwise specified.

DIMENSIONS

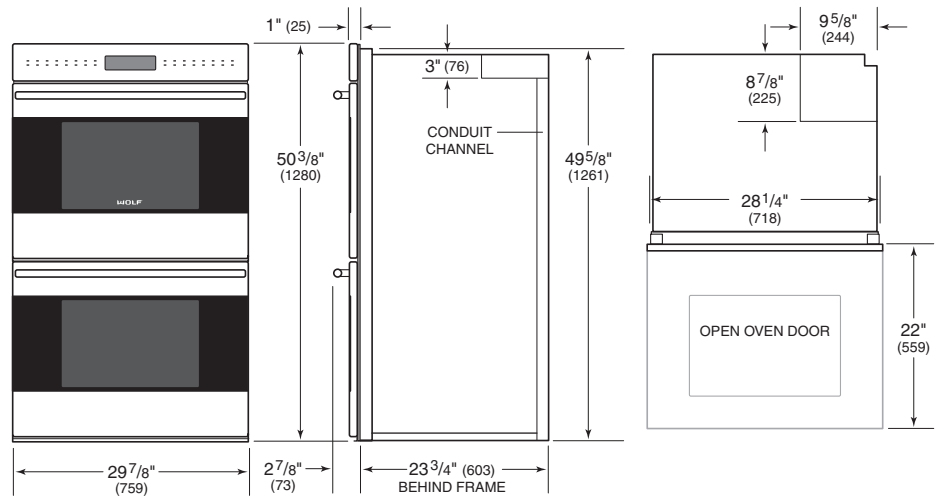


STANDARD INSTALLATION

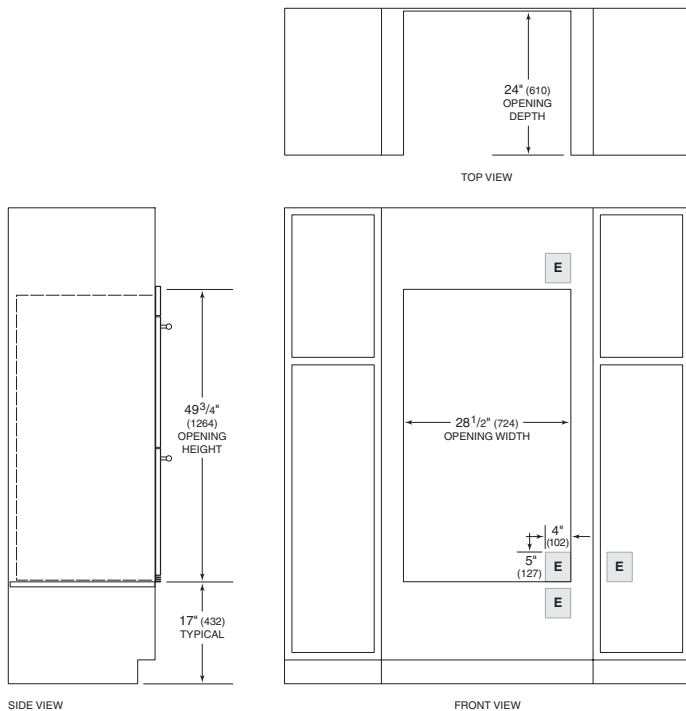

NOTE: Location of electrical supply within opening may require additional cabinet depth. Dashed line represents profile of unit.

FLUSH INSET INSTALLATION

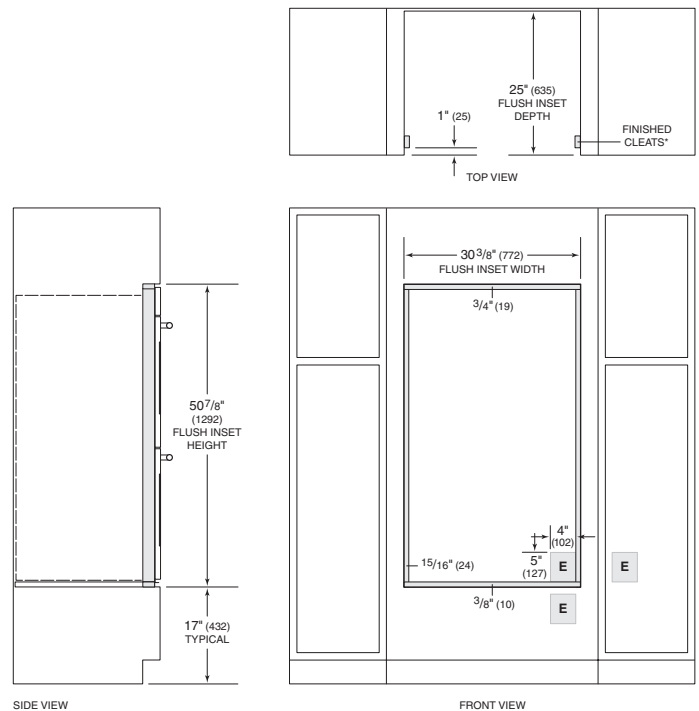

*Will be visible and should be finished to match cabinetry.

NOTE: Location of electrical supply within opening may require additional cabinet depth. Dashed line represents profile of unit.